

FEKA VS

SUBMERSIBLE PUMPS FOR WASTEWATER AND RAINWATER





TECHNICAL DATA

Flow rate: 3 m³h to 39 m³h
Head: 17 m
Pumped liquid: sewage and general wastewater, non-aggressive
Free passage: 50 mm
Liquid temperature range:
 0°C to +35°C for domestic use
 0°C to +50°C for other uses
Outlet Threaded: 2" GAS
Delivery direction: horizontal
Impeller: stainless steel Vortex
Protection degree: IP 68
Thermal classification of motor insulation: F
Power cable: H07RN-F
Possible installation types: fixed or portable in vertical position
Maximum immersion: 7 metres

Submersible pumps designed for domestic/residential and commercial applications, made entirely from stainless steel and suited to lifting solids-laden and waste water containing solid matter measuring up to 50 mm in diameter. With their hydraulics fine-tuned for purpose, we have achieved an overall increase in efficiency, resulting in reduced consumption for the same performance and reliability.

CONSTRUCTION FEATURES OF THE PUMP


The vortex impeller is made from stainless steel; there is a double mechanical seal with an oil chamber (non-toxic oil) between the two seals, which are made from carbon/alumina on the motor side and silicon carbide/silicon carbide on the pump side. The seal holder cover, motor housing, pump casing, cap and handle are all made from stainless steel. The handle is covered in insulating rubber. Built to Italian standards CEI 2-3 and CEI 61-69 (EN 60335-2-41). The maximum ambient temperature for operating FEKA VS is +40°C with the motor out of the fluid.

CONSTRUCTION FEATURES OF THE MOTOR

The asynchronous dry motor is watertight and cooled by the fluid being pumped. The rotor is mounted on lifetime-greased oversized ball bearings selected for quiet running and longevity. The motor shaft is made from AISI 316 stainless steel. Thermal overcurrent protection comes as standard on the single-phase version.

MATERIALS

N°	PARTS	MATERIALS
1	PUMP HOUSING	STAINLESS STEEL AISI 304
2	IMPELLER	STAINLESS STEEL AISI 304
3	SHAFT SEAL DISC	STAINLESS STEEL AISI 304
4	MOTOR CONNECTION FLANGE	STAINLESS STEEL AISI 304
5	LOWER BEARING SUPPORT	ALUMINUM
6	DOUBLE MECHANICAL SEAL	PUMP SIDE SIC / SIC
		MOTOR SIDE CARBON / ALUMINA
7	MOTOR CASE	STAINLESS STEEL AISI 304
8	MOTOR SHAFT	PUMP SIDE STAINLESS STEEL AISI 316
		MOTOR SIDE STEEL C10
9	UPPER BEARING SUPPORT	ALUMINUM
10	COVER CONNECTION	STAINLESS STEEL AISI 304
11	HANDLE	STAINLESS STEEL AND INSULATING RUBBER
12	SUPPLY CABLE	H07RN-F
13	FLOAT SWITCH CABLE	H07RN-F
14	O-RINGS	NBR
15	CABLE GLAND	NICHEL-PLATED BRASS

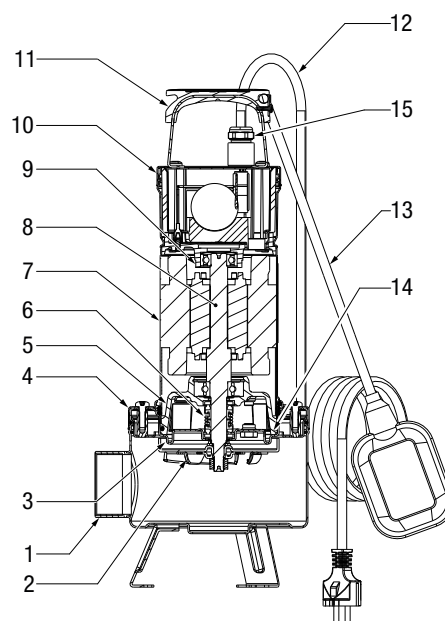


FEKA RANGE

SUBMERSIBLE PUMPS

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE


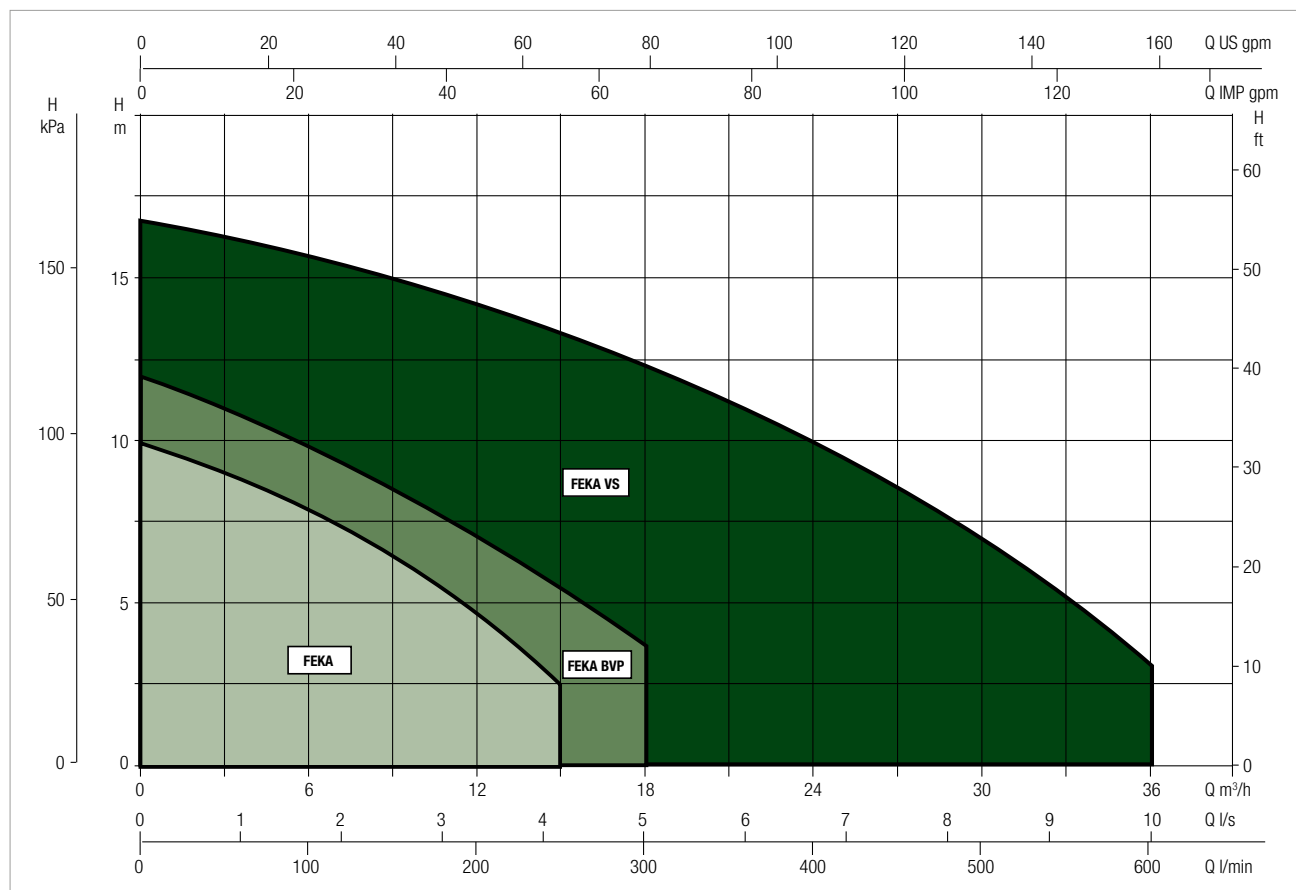


SELECTION TABLE - FEKA VS

MODEL	Q=m ³ /h	0	3	6	9	12	15	18	24	30	36
	Q=l/min	0	50	100	150	200	250	300	400	500	600
FEKA VS 550	H (m)	7,8	6,9	6,2	5,6	4,1	3,2	1,8			
FEKA VS 750		9,6	9,2	8,5	7,6	6,7	5,6	4,3	1,9		
FEKA VS 900		11,8	11,3	10,5	9,8	9	8	6,8	4,1		
FEKA VS 1100		14	13,4	12,8	12	11,2	10,1	9	6,7	4	
FEKA VS 1500		17	16	15,4	15,1	14,5	13,3	12,4	10,43	6,8	3,1

FEKA VS - SUBMERSIBLE PUMPS FOR WASTEWATER AND RAINWATER

Liquid temperature range: from 0°C to +35°C for domestic use (EN 60335-2-41) - from 0°C to +50°C for the other uses.

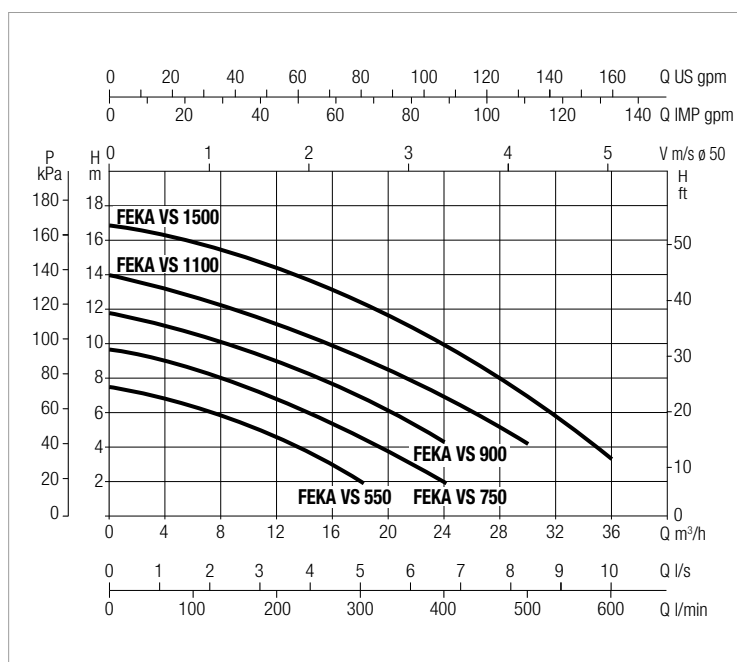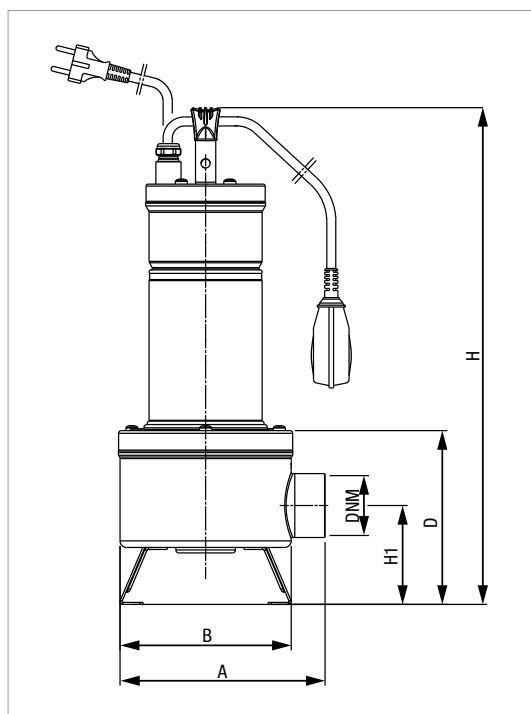

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.


MODEL	ELECTRICAL DATA				
	POWER INPUT 50 Hz	P1 MAX kW	P2 NOMINAL		In A
			kW	HP	
FEKA VS 550 A	1X220 - 240 V~	0,9	0,55	0,75	4,1
FEKA VS 550	1X220 - 240 V~	0,9	0,55	0,75	4,1
FEKA VS 550	3X400 V~	0,9	0,55	0,75	1,8
FEKA VS 750 A	1X220 - 240 V~	1,1	0,7	0,95	4,8
FEKA VS 750	1X220 - 240 V~	1,1	0,7	0,95	4,8
FEKA VS 750	3X400 V~	1,1	0,7	0,95	2
FEKA VS 900 A	1X220 - 240 V~	1,35	0,9	1,22	6,3
FEKA VS 900	1X220 - 240 V~	1,35	0,9	1,22	6,3
FEKA VS 900	3X400 V~	1,35	0,9	1,22	2,6
FEKA VS 1100 A	1X220 - 240 V~	1,6	1,1	1,5	7,3
FEKA VS 1100	1X220 - 240 V~	1,6	1,1	1,5	7,3
FEKA VS 1100	3X400 V~	1,6	1,1	1,5	2,9
FEKA VS 1500 A	1X220 - 240 V~	2	1,5	2	9,1
FEKA VS 1500	1X220 - 240 V~	2	1,5	2	9,1
FEKA VS 1500	3X400 V~	2	1,5	2	3,8

MODEL	A	B	D	H	H1	PACKING DIMENSIONS			WEIGHT Kg
						LA	LB	H	
FEKA VS 550	203	170	172	475	98	560	235	215	12,5
FEKA VS 750	203	170	172	475	98	560	235	215	12,5
FEKA VS 900	203	170	172	515	98	620	235	215	15,6
FEKA VS 1100	203	170	172	515	98	620	235	215	15,6
FEKA VS 1500	203	170	172	535	98	620	235	215	16,7


FEKA VS - SUBMERSIBLE PUMPS FOR WASTEWATER AND RAINWATER

Liquid temperature range: from 0°C to +35°C for domestic use (EN 60335-2-41) - from 0°C to +50°C for the other uses.

FIXED INSTALLATION

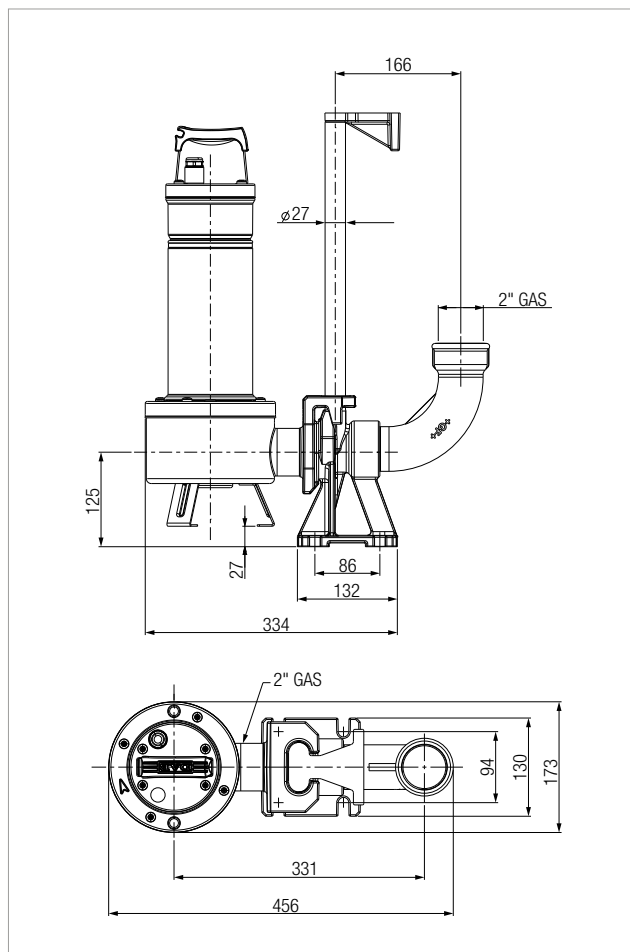

PORTABLE INSTALLATION

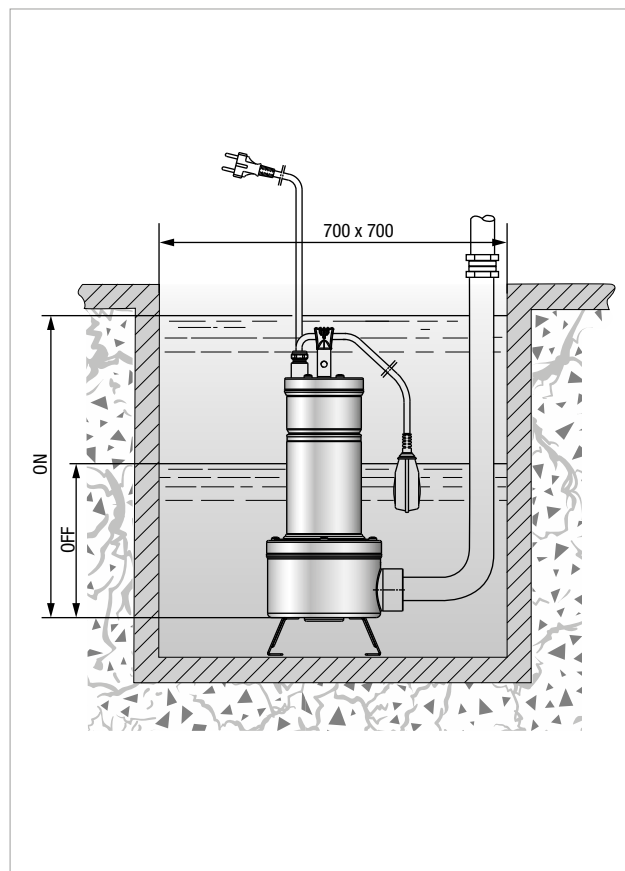

FEKA VS 550-750	ON 425 mm	OFF 360 mm
FEKA VS 900-1100	ON 480 mm	OFF 400 mm
FEKA VS 1500	ON 480 mm	OFF 400 mm



MAKING WATER EASY

Via Marco Polo, 14 - 35035 Mestrino (PD) Italy - Tel. +39.049.5125000 - Fax +39.049.5125950

www.dabpumps.com



On-line product selection



DAB PUMPS LTD.
Unit 6 Gilberd Court
Newcomen Way, Severalls Park
CO4 9WN
Colchester
ordersuk@dwtgroup.com
Tel. +44 0333 777 5010



DAB PUMPS IBERICA S.L.
Calle Verano 18-20-22
28850 - Torrejón de Ardoz - Madrid
Spain
Info.spain@dwtgroup.com
Tel. +34 91 6569545



DAB PUMPS DE MÉXICO, S.A. DE C.V.
Av Amsterdam 101 Local 4
Col. Hipódromo Condesa,
Del. Cuauhtémoc CP 06170
Ciudad de México
Tel. +52 55 553 2621



DAB PUMPS BV
'tHofveld 6 C1
1702 Groot Bijgaarden - Belgium
info.belgium@dwtgroup.com
Tel. +32 2 4668353



DAB PUMPS HUNGARY KFT.
H-8800
Nagykanizsa, Buda Ernő u.5
Hungary
Tel. +36 93501700



DAB PUMPS SOUTH AFRICA (PTY) LTD
Twenty One industrial Estate,
16 Purlin Street, Unit B, Warehouse 4
Olifantsfontein -1667 - South Africa
info.sa@dwtgroup.com
Tel. +27 12 361 3997



DAB PUMPS B.V.
Statenlaan, 4
5223 LA, 's-Hertogenbosch
Nederland
info.nl@dabpumps.com
Tel. +31 416 387280



DAB PUMPS POLAND Sp. z o.o.
Ul. Janka Muzykanta 60
02188 Warszawa - Poland
sprzedaz@dabpumps.com.pl



DAB PUMPS (QINGDAO) CO. LTD.
No.10 Xindong Road
Jiulong Town,
Jiaozhou City
266319 Qingdao (Shandong) - China
sales.cn@dwtgroup.com
Tel. +86 400 186 8280



DAB PUMPS FRANCE SAS
Tour Ariane, Paris la Défense 9
5, Place de la Pyramide
92800 Puteaux - France
info.fr@dabpumps.com
Tel. +33 (0)6 79 63 05 46
+33 (0)7 89 01 53 35



DAB PUMPS INC.
3226 Benchmark Drive
Ladson, SC 29456 - USA
info.usa@dwtgroup.com
Tel. 1- 843-797-5002
Fax 1-843-797-3366



DAB PUMPS OCEANIA PTY LTD
426 South Gippsland Highway,
Dandenong South VIC 3175 - Australia
info.oceania@dwtgroup.com
Tel. +61 1300 378 677



DAB PUMPS GMBH
Am Nordpark 3
D - 41069 Mönchengladbach - Germany
info.germany@dwtgroup.com
Tel. +49 2161 47388-0
Fax +49 2161 47388-36



DAB PUMPS CANADA INC.
333 Bay Street, Suite 4600, Toronto,
Ontario, M5H 2S5, - Canada
orders@dwtgroup.ca
Tel. 1-833-322-7867



PT DAB PUMPS INDONESIA
Satrio Tower lantai 26
unit C-D, Jl. Prof. Dr. Satrio Kav. C4,
Kel. Kuningan Timur, Kec. Setiabudi, Kota Adm.
Jakarta Selatan, Prov. DKI Jakarta. - Indonesia
Tel. +62 2129222850